


## Metal inspection hatches, flush-mounted ESLM

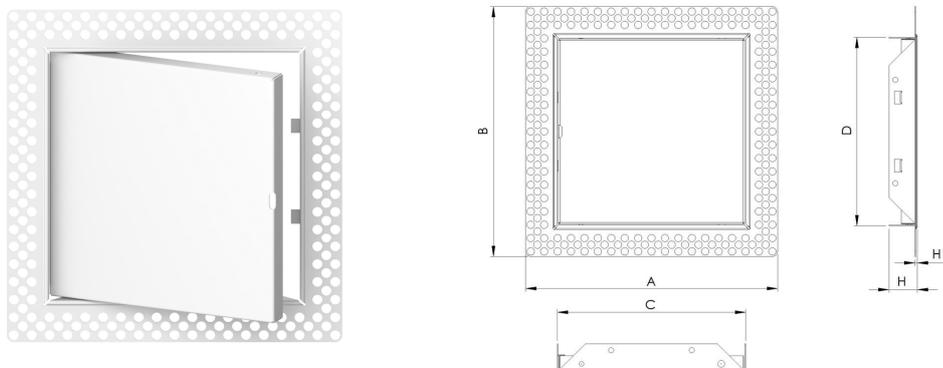

### Description

Flush-mounted metal inspection hatches allow easy access to built-in communications. These hatches are a low-profile access solution for walls and ceilings, becoming almost invisible after installation. The panels are designed for interior finishing applications and characterized by resistance to moisture and mechanical damage.

The hatches are fully installed from the room side, with no need for access from inside the wall cavity. ESLM hatches are equipped with a perforated metal frame that ensures better adhesion to plaster and joint compounds, as well as a raised edge profile for creating precise and straight finishing lines.

### Technical data

Construction	Made from galvanized steel or other metals Perforated metal frame Raised edge profile - for perfect application of plaster or joint compounds Easily removable hatch door
Installation	Mounting in the wall or ceiling Fixed with screws and treatment with compounds
Colors	White

### Dimensions

Type	A [mm]	B [mm]	C [mm]	D [mm]	H [mm]	H1 [mm]	m [kg]
ESLM1515	185	185	127	127	27	2,2	0,25
ESLM2020	235	235	177	177	27	2,2	0,40
ESLM2030	235	335	177	277	27	2,2	0,56
ESLM2550	285	535	227	477	27	2,2	1,06
ESLM3020	335	235	277	177	27	2,2	0,56
ESLM3030	335	335	277	277	27	2,2	0,78
ESLM4030	435	335	377	277	27	2,2	1,01
ESLM4040	435	435	377	377	27	2,2	1,28
ESLM4060	435	635	377	577	27	2,2	1,83
ESLM5050	535	535	477	477	27	2,2	1,89
ESLM6060	635	635	577	577	27	2,2	2,61

Inspection hatches are available in other sizes upon special order